

INTREPID

The Intrepid is an Independent Leg Cantilever Jack-Up with operational history in the Middle East and the Gulf of Mexico.



GENERAL (U.S.)

Built	2008 Keppel AmFELS
Design	LeTourneau Super 116-C Independent Leg Cantilever
Flag/Class	Singapore / ABS
Dimensions	298 ft Long / 219 ft Wide / 26 ft Deep
Draft	16 ft Transit
Displacement	25,800 st at Loadline
Variable Load	2,216 st Transit / 3,505 st Drilling
Accommodations	102 Persons
Helideck	S61N
Max. Water Depth	Up to 350 ft
Max. Drilling Depth	30,000 ft
Legs	3 x 477.47 ft Square Truss / 420 ft Useable Below Hull
Legs Spacing	142 ft Transverse / 129 ft Longitudinal
Spudcans	46 ft Diameter
Jacking System	LeTourneau 16 x Pinions/Leg
Mooring Winches	4 x NOV Amclyde JU-36 50 HP 25 st Pull
Mooring Lines	4 x 2,000 ft 1-1/2" Diameter IWRC
Anchors	4 x Flipper Delta 5.51 st

STORAGE CAPACITIES

Fuel	2,024 bbl
Drill Water	11,300 bbl
Potable Water	1,658 bbl
Active / Reverse Liquid Mud	3,260 bbl
Base Oil	1,124 bbl
Brine	1080 bbl
Bulk Bentonite / Barite	6,400 ft3
Bulk Cement	4,800 ft3
Sack Storage	5,000 Sacks

DRILLING PACKAGE

Cantilever Envelope	70 ft x 15 ft x 15 ft
Derrick	NOV Drecto 170 ft Tall with 32 ft x 35 ft Base 964.3 st Gross Nominal Capacity
Top Drive	NOV TDS-8SA Rated for 750 st Hoisting Capacity Max. Continuous Torque 62,500 ft-lbs
Drawworks	National 1625 UDBE w/ 1-5/8" Drill Line Max.Line Pull 12 Lines of 760 st
Rotary Table	NOV-495, 49.5" Max. Opening
Tubular Handling	NOV -120 Iron Roughneck
Mud Pumps	3 x LEWCO w-2214, 2,190 HP
HP Mud System	Rated for 7,500 psi
Shale Shakers	5 x Brandt CM-3D

WELL CONTROL

BOP (LP)	Cameron Type U 21-1/4" 2 x RAM 2,000 psi, 1 20-3/4 RAM 3,000 PSI, Shaffer Spherical Annular 21-1/4", 2,000 psi
BOP (HP)	Cameron Type U 13-5/8" 4 x RAM 15,000 psi 1 x Shaffer Spherical 13-5/8" 10,000 psi
Diverter	1 x Shaffer Spherical 30" 600 psi
BOP Handling	2 x Ingersoll-Rand 135 st Hoist
Choke & Kill Manifold	JVS 15,000 psi
Conductor Tensioning	CLAXTON Inc. 4 x Lift Points Total Tension 125 st

CRANES

Primary Cranes	3 x LeTourneau PCM120SS 1 x 120 ft Boom, 38 st @ 25 ft 2 x 100 ft Boom, 45 st @ 22 ft
X-Mas Tree Handling	2 x Ingersoll-Rand 82.6 st Hoist

POWER

Main Engines	4 x Caterpillar 3516B HD 2,150 HP Diesel Engines
Main Generators	4 x Baylor 2,011 HP
Emergency Power	1 x Caterpillar 3516B HD 2,150 HP Diesel Engine (Separate From 4 Main Engines)

Further information: +52 938 120 24 23

The above information is intended for general reference only. All equipment and specifications are subject to change at any time. Revised October 8th, 2024.

INTREPID

The Intrepid is an Independent Leg Cantilever Jack-Up with operational history in the Middle East and the Gulf of Mexico.



GENERAL (METRIC)	
Built	2008 Keppel AmFELS
Design	LeTourneau Super 116-C Independent Leg Cantilever
Flag/Class	Singapore / ABS
Dimensions	90.7 m Long / 66 m Wide / 7.9 m Deep
Draft	4.9 m Transit
Displacement	13,982 mt at Loadline
Variable Load	2,010 mt Transit / 3,505 st Drilling
Accommodations	102 Persons
Helideck	S61N
Max. Water Depth	Up to 106.7 m
Max. Drilling Depth	9,144 m
Legs	3 x 145.53 m Square Truss / 128 m Useable Below Hull
Leg Spacing	43.3 m Transverse / 39.3 m Longitudinal
Spudcans	14 m Diameter
Jacking System	LeTourneau 16 x Pinions/Leg
Mooring Winches	4 x NOV Amclyde JU-36 67 kW 22.7 mt Pull
Mooring Lines	4 x 609.6 m 38.1 mm Diameter IWRC
Anchors	4 x Flipper Delta 5 mt
STORAGE CAPACITIES	
Fuel	322 m ³
Drill Water	1,797 m ³
Potable Water	264 m ³
Active / Reverse Liquid Mud	517 m ³
Base Oil	179 m ³
Brine	171 m ³
Bulk Bentonite / Barite	181 m ³
Sack Storage	5,000 Sacks



DRILLING PACKAGE	
Top Drive	NOV TDS-8SA Rated for 680.6 mt Hoisting Capacity Max. Continuous Torque 84,739 nm
Drawworks	National 1625 UDBE w/41.275 mm Drill Line Max. Line Pull 12 Lines of 689 mt
Rotary Table	NOV-495, 1.257 m Max. Opening
Cantilever Envelope	21.4 m x 4.6 m x 4.6 ft
Tubular Handling	NOV st-120 Iron Roughneck
Mud Pumps	3 x LEWCO w-2214, 1618 kW
HP Mud System	Rated for 517 Bar
Shale Shakers	5 x Brandt cm 3D
WELL CONTROL	
BOP (LP)	Cameron Type U 53.975 cm 2 x RAM 138 Bar, 1x 52.7 cm RAM 207 Bar, 1x Shaffer Spherical 53.975 cm 138 Bar
BOP (HP)	Cameron Type U 34.6075 cm 4 x RAM 689 Bar 1 x Axon Spherical 34.6075 cm 689 Bar
Diverter	1 x Shaffer Spherical 76.20 cm 69 Bar
BOP Handling	2 x Ingersoll-Rand 150 mt Hoist
Choke & Kill Manifold	JVS 1,034 Bar (15,000 psi)
Conductor Tensioning	Drilling Structures Inc. 4 x Lift Points Total Tension 113 mt
CRANES	
Primary Cranes	3 x LeTourneau PCM10SS 1 x 36.58m Boom, 34.5 mt @ 7.62 m 2 x 30.5 m Boom, 41.1 mt @ 6.71 m
X-Mas Tree Handling	2 x Ingersoll-Rand 75 mt Hoist
POWER	
Main Engines	4 x Caterpillar 3516B HD 1,603 kW Diesel Engines
Main Generators	4 x Baylor 1,500 kW
Emergency Power	1 x Caterpillar 3516B HD 1,603 kW Diesel Engine (Separate From 4 Main Engines)

Further information: +52 938 120 24 23

The above information is intended for general reference only. All equipment and specifications are subject to change at any time. Revised October 8th, 2024.

INTREPID

The Intrepid is an Independent Leg Cantilever Jack-Up
with operational history in the Middle East and the Gulf of Mexico.

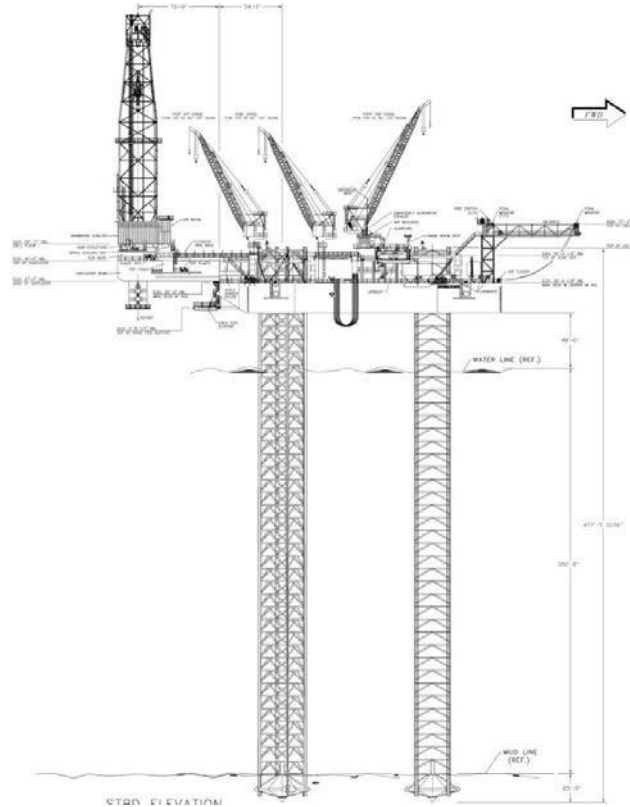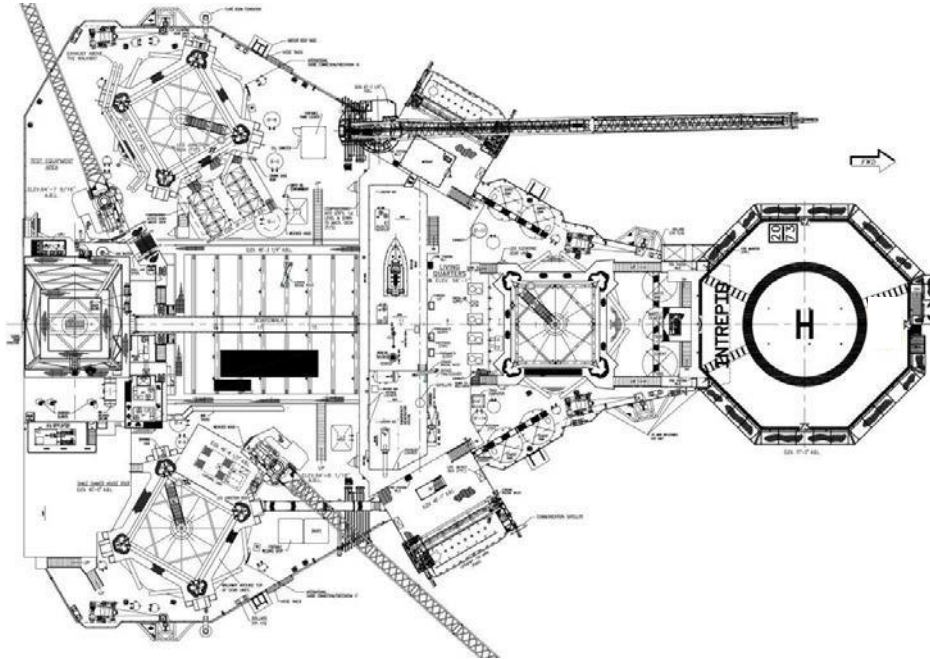

Further information: +52 938 120 24 23

The above information is intended for general reference only. All equipment and specifications are subject to change at any time. Revised October 8th, 2024.